
SensorsX

SX-PFZAAC01 Series

Resistive Flexible Film Pressure Sensor — Touch & Pulse Sensing

Touch Sensing | Pulse Detection | Wearables | IoT Devices

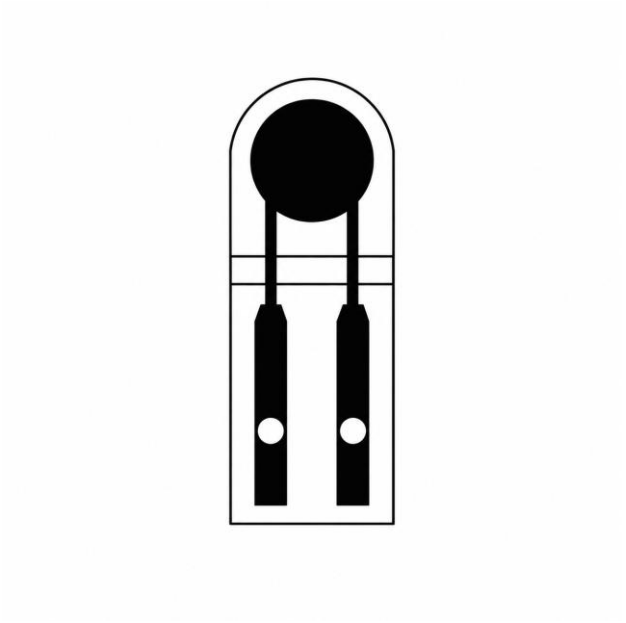


10-100 gf (0.098-0.981 N) Sensing Range	**0.3 mm** Thickness	**< 10 gf (< 0.098 N)** Response Point
< 5 ms Response Time	**> 1 MΩ** Initial Resistance (no load)	**3.3 V typical** Test Voltage

Touch Sensing | Pulse Detection | Wearables | IoT Devices

■ PRODUCT OVERVIEW

The SX-PFZAAC01 Resistive Flexible Film Pressure Sensor is designed specifically for touch and pressure sensing applications. It offers high sensitivity, flexibility, and bend resistance. Based on flexible nano-material technology, the response time is less than 5 ms. Long service life with capability to withstand more than 1,000,000 repeated presses. Low power consumption with near open-circuit state at standby. Sensor shape, measurement range, and minimum response point are all customizable.



■ KEY FEATURES

- ◆ High Sensitivity Designed for touch pressure sensing with high sensitivity
- ◆ Flexible & Bend-Resistant Flexible construction that withstands repeated bending
- ◆ Fast Response Nano-material technology with response time < 5 ms
- ◆ Long Service Life Withstands > 1,000,000 repeated presses
- ◆ Low Power Near open-circuit state at standby; low power consumption

■ TYPICAL APPLICATIONS

Industries Served

● Touch pressure sensing interfaces	● Pulse and heart rate detection	● Wearable health devices


The information in this document is subject to change without notice. SensorsX Technology Inc. assumes no responsibility for errors or omissions.

● Smart Seat Cushion	● Consumer electronics	● IoT devices

■ PERFORMANCE SPECIFICATIONS

Sensing	
Model Number	SX-PFZAAC01
Sensing Range	10-100 gf (0.098-0.981 N)
Sensor Thickness	0.3 mm
Response Point	< 10 gf (< 0.098 N)
Overall Dimensions	See dimension drawing below
Electrical	
Initial Resistance	> 1 MΩ (no load)
Test Voltage	3.3 V (typical)
Environmental	
Operating Temperature	< 60 °C (< 140 °F)
Mechanical	
Durability	> 1,000,000 flex cycles (repeated presses)
Response Time	< 5 ms
EMC	
EMI Emissions	None generated
ESD Sensitivity	Insensitive
Customization	
Shape	Customizable sensor shape — contact factory
Range & Response Point	Customizable sensing range and minimum response point — contact factory

■ MECHANICAL DIMENSIONS

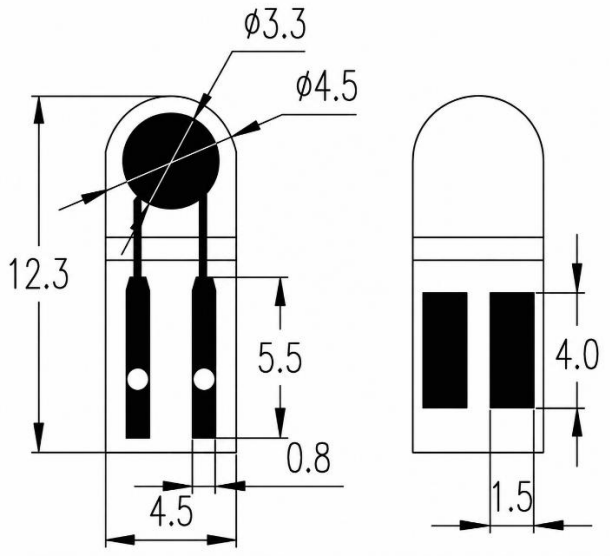

※ Sensor shape, sensing range, and minimum response point are customizable. Contact SensorsX Technology Inc. for custom configurations.

The information in this document is subject to change without notice. SensorsX Technology Inc. assumes no responsibility for errors or omissions.